

ZOOMLION TECHNOLOGY WITH INGENUITY AND CARE



THE WORLD'S LEADING EXCAVATOR INTELLIGENT MANUFACTURING FACTORY

ZOOMLION Smart City Earthmoving Machinery Park is an industry-leading intelligent and flexible excavator factory. From a piece of steel plate to an excavator, with high-precision welding process, highly reliable assembly process, high-level coating process and strict quality control, each excavator is delivered with ultimate quality.



DJJ Equipment

NSW - 100 Derby Street, Silverwater NSW 2128
WA - 56 Clavering Road, Bayswater WA 6053
QLD - 65-67 Beal Street, Meadowbrook QLD 4131

TEL: 1800 355 388
Email: sales@djjequipment.com.au



ZOOMLION 3.5-TONNAGE CRAWLER HYDRAULIC EXCAVATOR

ZE35GU



ZOOMLION



ZOOMLION MINI-EXCAVATOR

ZE35GU


Engine power:
18.2 kW@2200 rpm

Operating weight:
3690 kg (Canopy)
3790 kg (Cab)

Bucket capacity:
0.1 m³




ZOOMLION MINI-EXCAVATOR

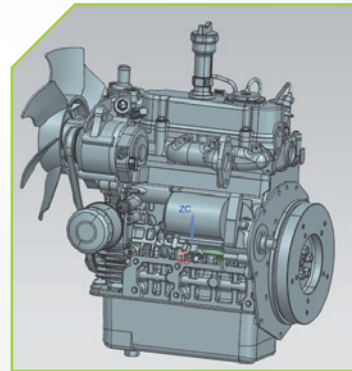

FAMOUS BRAND ENGINE

Famous brand engine with three-vortice combustion system (E-TVCS); Mechanical speed regulation; High power, sufficient power reserve, fuel saving.

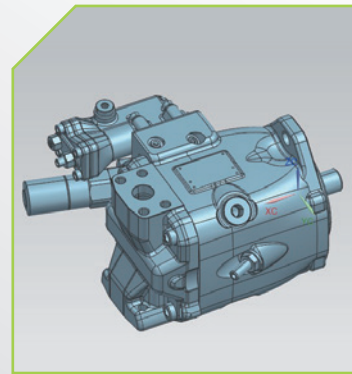

THE NEW-GENERATION OF ZOOMLION MAIN PUMP

The 45cc large-displacement main pump is combined with the large-torque, high-power reserve engine to achieve low fuel consumption and high working efficiency



VERSATILE ZE35GU

Versatile ZE35GU has powerful performance and features, which can easily meet customer needs. A high configuration model is equipped with a breaker pipeline, a quick coupler pipeline, and multiple attachment pipelines, and allows the user to control the pipeline with a switch on the joystick for easier operation.

ZERO-TAIL SWING




One of ZE35GU's highlights is zero tail swing, its radius of swing will not exceed the width of the track in the full expanded state. This design means that it can work in narrow spaces and on busy roads, not limited by space.



LOAD SENSITIVE SYSTEM

It can provide and distribute the flow according to the needs of the system, which meets the requirements of the actuator speed regulation and compound action, where the working efficiency is higher than that of the three-pump throttling system.

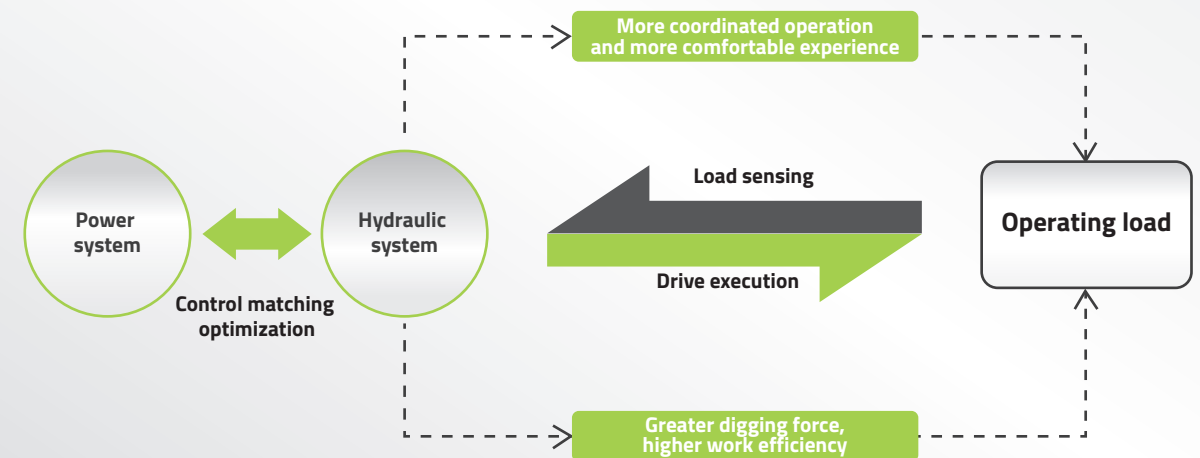

CONTROL PANEL

The LCD instrument panel provides key control. The user-friendly operation panel is not only full of technology, but also retains the physical key touch feeling. The menu bar on the right allows you to view key information such as engine speed, coolant temperature, and fuel level.



SELF-DEVELOPED A/C SYSTEM

The machine is equipped with ZOOMLION self-developed new air conditioning system, with heating and cooling air conditioning functions and internal and external circulation system, providing adequate air volume for better comfort.

ELECTRIC PROPORTIONING JOYSTICK FOR A HIGH-CONFIGURATION MACHINE

The electric proportional joystick of a high configuration machine can better assist customers in controlling various attachments to complete various tasks.



HIGH RELIABILITY

The working pipeline is close to the upper part of the boom to avoid bumping into the pipeline during operation. Our design philosophy is to ensure equipment safety and build trust with customers.




The dozer pipeline is equipped with a protective plate to cope with difficult working conditions, protecting the cylinder and line at the same time.



OPEN INSPECTION

By opening the side door on one side, you can easily check the radiator, hydraulic oil, safety switch and other projects.

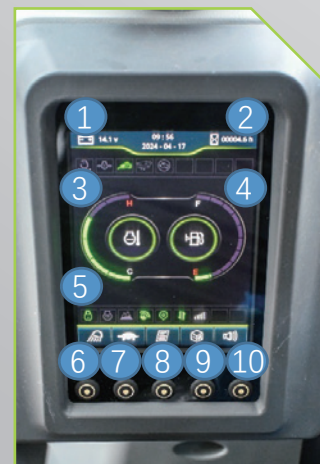


1. Battery voltage	2. Working hours
3. Hydraulic oil temperature	4. Fuel quantity
5. Fault warning	6. Light
7. High and low speed switching	8. Menu bar
9. Operation menu	10. Alarm



ONE-STOP MAINTENANCE

To open the whole tail covering piece, you only need to gently press the lock and rotate the buckle. All maintenance parts are within reach, where maintenance space is large, and the maintenance method is simple. It greatly saves the maintenance time and increases the work efficiency.

ZE35GU	
DIMENSIONS	
Overall length A	4960 mm
Overall width B	1700 mm
Total height C	2530 mm
Overall gauge D	1400 mm
Length of track on ground E	1640 mm
Tail swing radius F	850 mm
Counterweight ground clearance G	568 mm
Minimum ground clearance H	285 mm
PERFORMANCE PARAMETERS	
Operating weight	3790 kg (Cab) / 3690 kg (Canopy)
Standard bucket capacity	0.1 m ³
Rated power	18.2 kW@2200 rpm
Traveling speed (high/low)	4.2/2.3 km/h
Swing speed	9 rpm
WORK RANGE (mm)	
Max. digging reach A'	5525 mm
Max. digging reach at ground level B'	5407 mm
Max. digging depth C'	3003 mm
Max. vertical digging depth D'	2124 mm
Max. digging height E'	4859 mm
Min. swing radius of the front F'	2452 mm

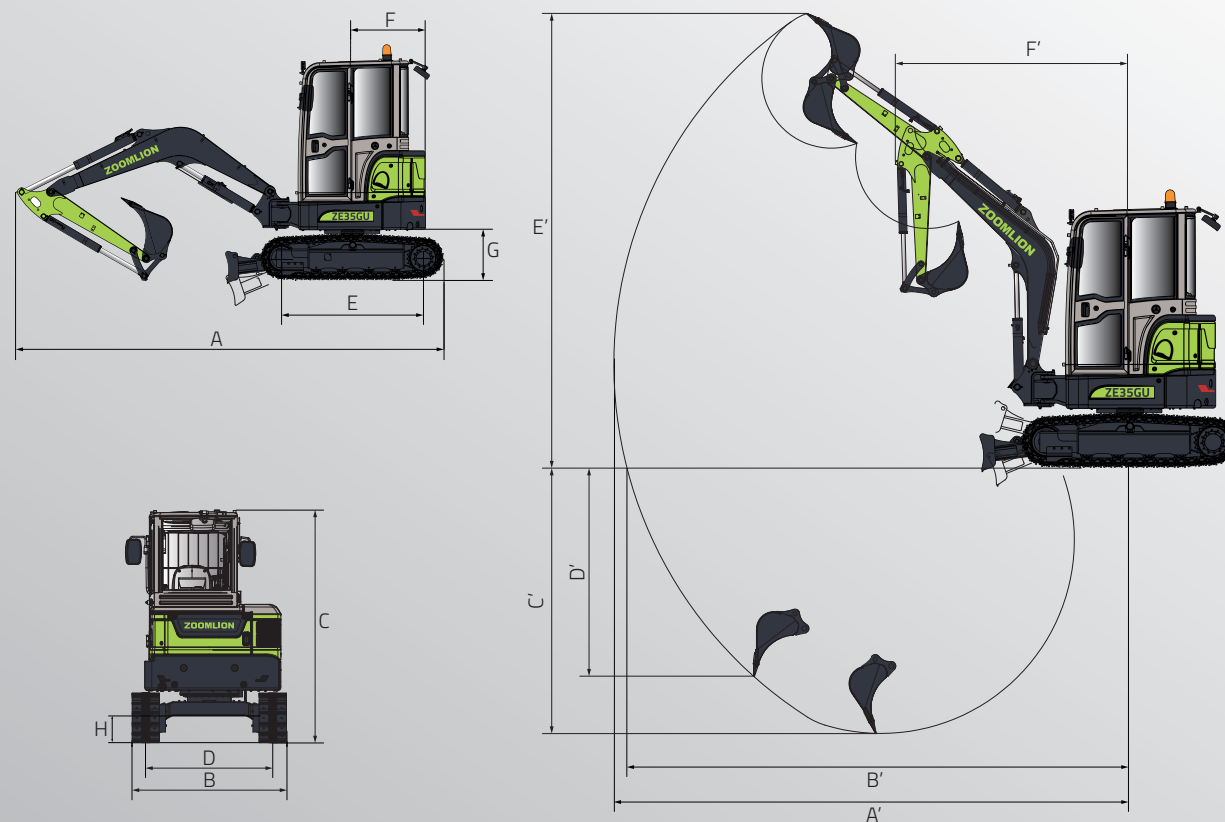


ZE35GU	
HYDRAULIC SYSTEM	
Main pump	Maximum discharge: 91 L/min
Working oil circuit	24.8 MPa
Swing oil circuit	24.8 MPa
Traveling oil circuit	21.6 MPa
Pilot oil circuit	3.5 MPa
BASIC TECHNICAL DATA	
Digging force of bucket (ISO)	31.5 kN
Digging force of arm (ISO)	19.5 kN
Max. drawbar pull	33.6 kN
Boom length	2540 mm
Arm length	1350 mm
AMOUNT OF FILLING FOR MAINTENANCE	
Fuel tank capacity	50 L
Engine coolant	5.6 L
Engine oil	5.1 L
Traveling device (each side)	0.7 L
Hydraulic system	50 L
Hydraulic tank	30 L

LIFT CAPACITY

LIFT POINT HEIGHT	Lift Point Radius (2 m)		Lift Point Radius (3 m)		Lift Point Radius (4 m)		Lift Point Radius (MAX)	
	over-front (kg)	over-side (kg)	over-front (kg)	over-side (kg)	over-front (kg)	over-side (kg)	over-front (kg)	over-side (kg)
4.0 m							690*	690
3.0 m					635*	594	660*	540
2.0 m			852*	852	693*	583	668*	454
1.5 m			1037*	897	754*	573	677*	434
1.0 m			1212*	871	814*	563	689*	426
0.5 m			1332*	851	865*	553	704*	429
0 m			1386*	840	893*	547	718*	441
-1.0 m	2323*	1632	1312*	836	825*	546	742*	514

Notes:

1. Load with * is limited by hydraulic capacity and based on ISO10567. Rated loads do not exceed 87% of the hydraulic capacity.
2. Load without * is limited by tipping load and based on ISO10567. Rated loads do not exceed 75% of the tipping capacity.
3. The excavator bucket, hook, sling and other lifting accessories are not included in this table.

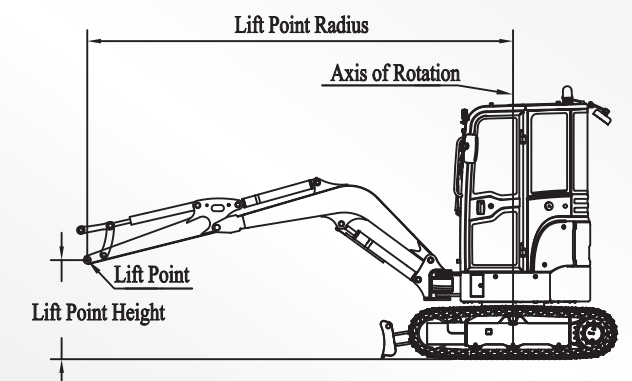

SYSTEM	CONFIGURATION ITEM	ZE35GU	
Power system	Engine	● Kubota	
	Emissions from engine	Euro V/T4F	
	Power kW/rpm	18.2/2200	
Hydraulic system	Air filter	●	
	Boom explosion-proof valve	●	
	Arm explosion-proof valve	●	
	Breaker pipeline (one/two-way switchable)	●	
	Attachment pipeline	●	
	Quick coupler pipeline	●	
Cab	Flow regulation attachment pipeline	●	
	Canopy	○	
	Cab	●	
	FOPS	●	
	ROPS	●	
	Fire extinguisher	●	
	Multifunctional joystick	●	
	Lower structure	Two-bar steel crawler	○
		Rubber crawler track	●
		Rubber track block	● 300 mm
Carrier roller, single side		● Single carrier roller	
Track roller, single side		● 4	
Lower rail damp, single side		○ Single guard rail	
Track gauge		1400 mm	
Tread		1640 mm	
Bulldozer blade		●	
Work equipment		Standard boom length	● 2540 mm
	Standard arm length	● 1350 mm	
	Arm for thumb damp	○ 1350 mm	
	Standard configuration	● 0.1 m ³ reinforced bucket	
Bucket	Optional part 1	○ 300 mm narrow bucket	
	Optional part 2	○ 1200 mm wide flat bucket	
Electrical	Audible and visual alarm	●	
	LED working lamps (front)	● 2	
	LED working lamps (back)	○ 1	
	Emergency stop switch	●	
	12V power port	●	
	Boom working light	● 1	
	GPS	●	
Attachments	AM/FM radio AM/FM	●	
	Recommended breaker drill rod diameter 1	53 mm	
	Straight breaker	○	
	Hydraulic quick coupler	○	
	Ripper	○	
	Tilt soil bucket	○	
	Auger (with 300mm drill bit)	○	
	Auger extension rod	○ 600 mm	
Auger bit 450mm	○		
Others	Thumb damp	○	
	Auxiliary counterweight	○	
	Cab rearview mirror	○ 1(Canopy) / ● 3(Cab)	

● STANDARD ○ OPTIONAL

