


WS Series Electric Pallet Truck With Lithium Battery Specification

| Characteristics | Manufacturer           |                              | HANGCHA GROUP CO.,LTD. |                   |                   |                   |                  |
|-----------------|------------------------|------------------------------|------------------------|-------------------|-------------------|-------------------|------------------|
|                 | Model                  |                              | CBD18-WS-SE            | CBD15-WS-65L      | CBD15-WS          | CBD20-WS          |                  |
|                 | 1.1                    | Capacity                     | kg                     | 1800              | 1500              | 2000              |                  |
|                 | 1.2                    | Load center                  | mm                     | 600               | 600               | 600               |                  |
|                 | 1.3                    | Overall fork width           | mm                     | 550/685           | 550/685           | 550/685           |                  |
|                 | 1.4                    | Fork length                  | mm                     | 1150/1220         | 1150/1220         | 1150/1220         |                  |
|                 | 1.5                    | Overall length               | mm                     | 1552/1622         | 1552/1622         | 1552/1622         |                  |
|                 | 1.6                    | Overall height of fork       | mm                     | 82±2              | 65±2              | 82±2              |                  |
|                 | 1.7                    | Max.height of fork           | mm                     | 197               | 165               | 197               |                  |
|                 | 1.8                    | Overall height (with tiller) | mm                     | 1250              | 1250              | 1250              |                  |
|                 | 1.9                    | Rear body width              | mm                     | 550/685           | 550/685           | 550/685           |                  |
| 1.10            | Minimum turning radius | mm                           | 1353/1426              | 1353/1426         | 1353/1426         |                   |                  |
| Performance     | 2.1                    | Max.Traveling speed          | laden<br>unladen       | km/h<br>km/h      | 4<br>5            | 4<br>5            |                  |
|                 | 2.2                    | Gradeability                 | laden<br>unladen       | %<br>%            | 6<br>20           | 6<br>20           |                  |
|                 | 2.3                    | Traveling                    | kw                     | DC 0.75 Brushless | DC 0.75 Brushless | DC 0.75 Brushless | DC 1.0 Brushless |
|                 | 2.4                    | Lifting                      | kw                     | Hydraulic         | DC 0.8            | DC 0.8            | DC 0.8           |
|                 | 4.1                    | Voltage                      | v                      | 48                | 48                | 48                | 48               |
| Battery         | 4.2                    | Capacity/type                | Ah                     | 10 Ah Lithium     | 10 Ah Lithium     | 10 Ah Lithium     | 15 Ah Lithium    |
|                 | Brake Type             | 5.1                          | Travel brake           |                   | Regenerate        | Regenerate        | Regenerate       |
| 5.2             |                        | Brake                        |                        | Electromagnetic   | Electromagnetic   | Electromagnetic   | Electromagnetic  |
| Controller      | 6.1                    | Controller                   |                        | B1503             | B1503             | B1503             | B1503            |

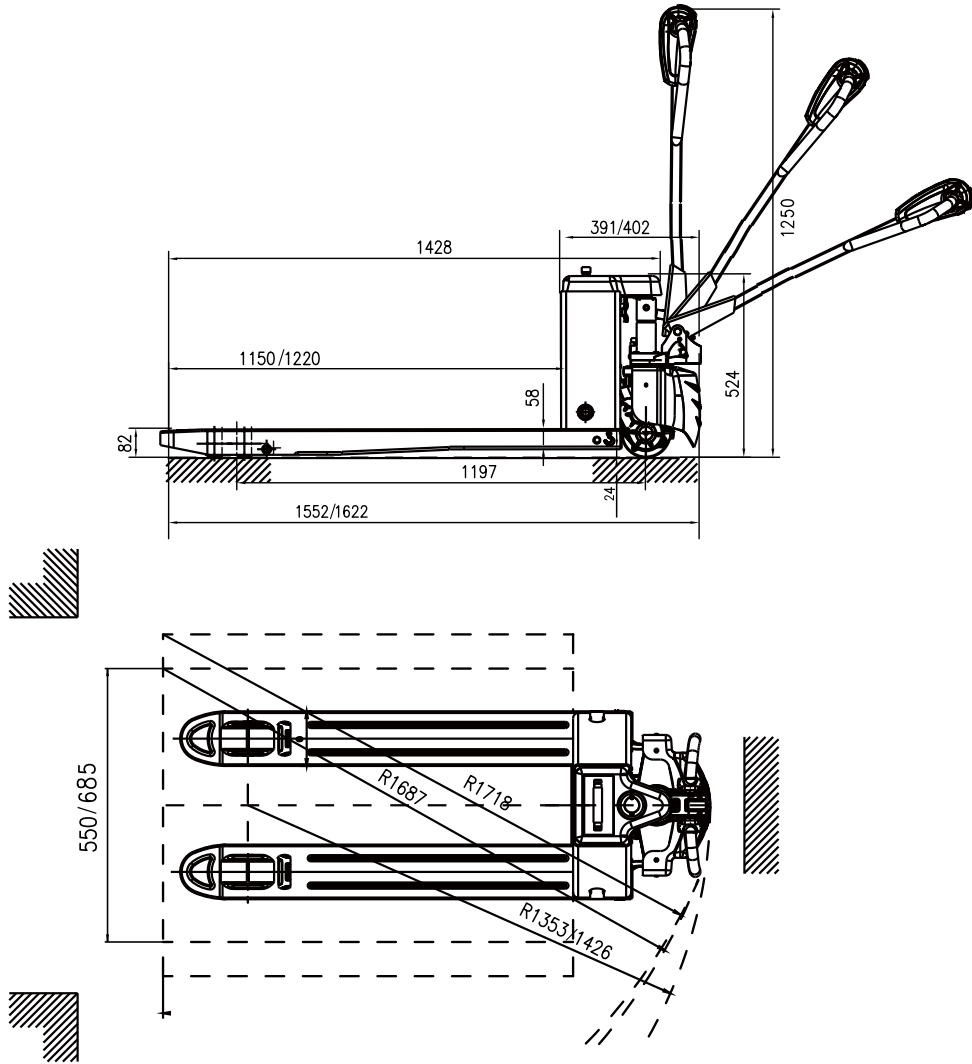

ZHEJIANG HANGCHA IMP. &EXP. CO., LTD.

Factory site: 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



ISO14001  
ISO14001:2015



ISO9001  
ISO9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors,equipment,or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.




WS Series Electric Pallet Truck  
With Lithium Battery

with capacities of 1,500/1,800/2,000kg

The World of Hangcha  
SINCE 1956




## PERFORMANCE

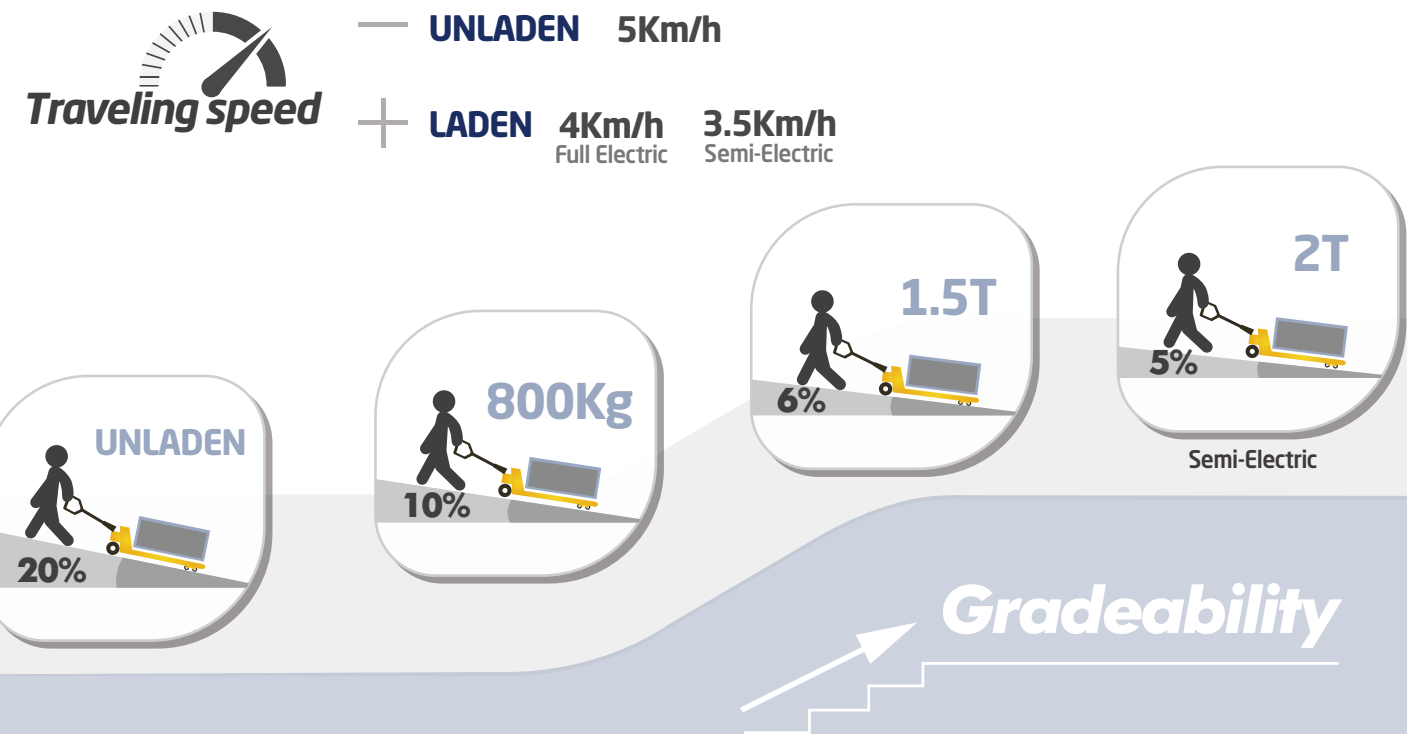


## SMART FUNCTION


### SMART FUNCTION 01

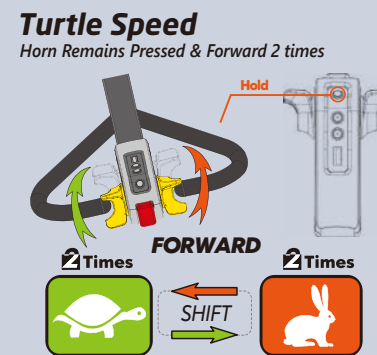

### SMART FUNCTION 02

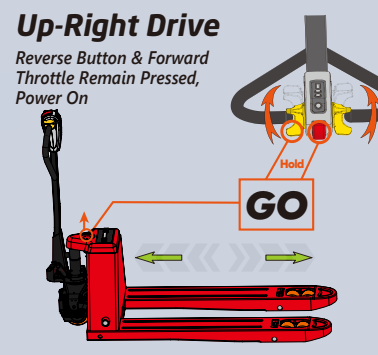


### SMART FUNCTION 03

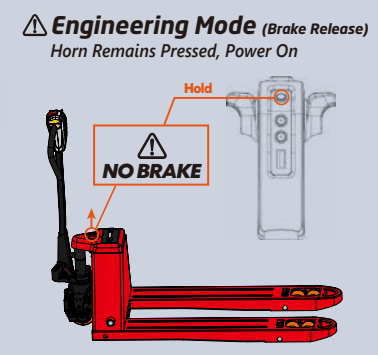


- ⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.
- ⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

## CHARACTERISTICS

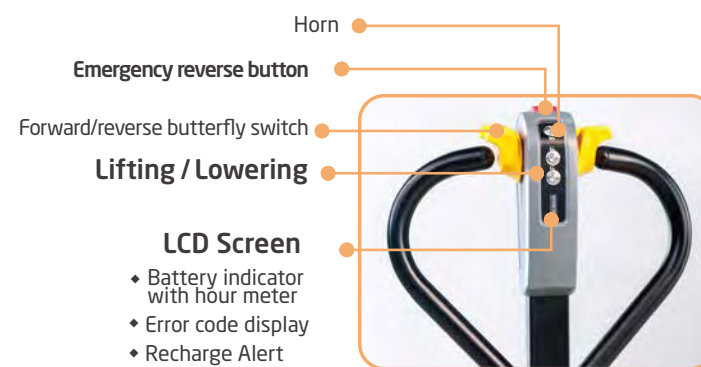

Multi-function Handle (Full Electric)



Multi-function Ergonomic Handle (Semi-electric)



Protection cover



Electric Lifting/Lowering



Lithium battery pack



Battery Protection Stopper

## OPTIONS



Tandem/Single PU wheel



15Ah Lithium Battery



Fast Charger 2hrs




Intelligent Control Key

BUILT TO WORK  
**24**  
HOURS


### SMART SIZE ALMOST SAME




### LIGHT WEIGHT




### EFFICIENCY



### EASY MAINTENANCE



### LIFETIME



## MAINTENANCE SO EASY

**5 YEAR WARRANTY CHASSIS**



Brushless drive motor, maintenance free



Lithium battery maintenance free



Recharge Alert



Error code display



6s Replace Battery



60s Replace Drive Wheel

PAY A LITTLE MORE  
SAVE MUCH MORE

max